

Operating Instructions for Casino Caddy


Caddy Fill from Fryer




Whenever handling hot oil, always remember to wear your personal protective equipment (PPE).



Filter the oil and clean the Fryer according to your company's standard operational procedure.

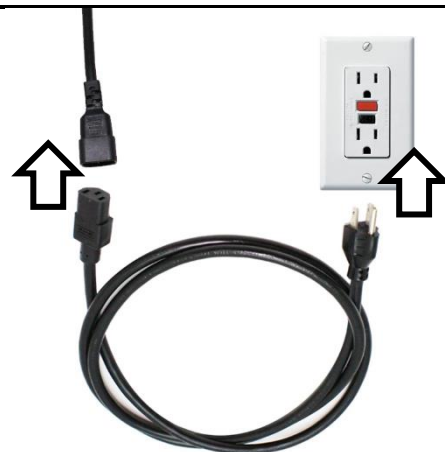

Using the Power Cord, make sure the cord is connected to the Motor Pigtail, then plug the Caddy into an outlet.

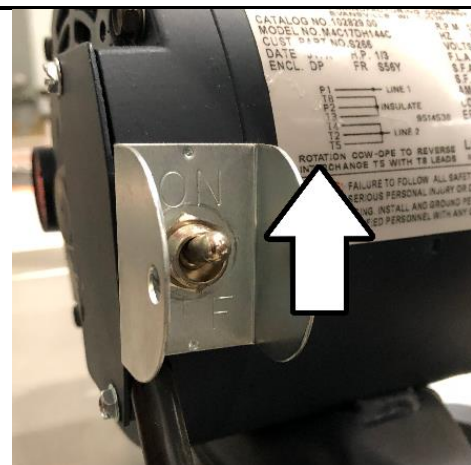

Turn on the Caddy Motor ON and remove the wand from the holder.



Insert the Wand into the Fryer. Hold the Wand until as much oil as possible is removed from the Fryer.



Turn the Motor OFF, unplug the caddy, and return the Wand to the holder. Ensure the Caddy Lid is SHUT and SEALED before transporting.

Discharge to Tank




Disconnect the White Hose from the Caddy by pulling back on the collar.



Connect the White Hose to the Grease Tank Inlet.



Using the Caddy Cord, make sure the cord is connected to the Motor and plug the Caddy Cord into the Control Panel.

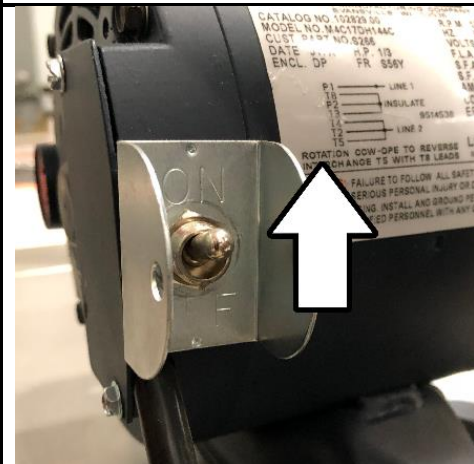


Turn the Motor ON.



Press and hold the Control Panel Push to Pump Button until the Caddy is empty.



Turn OFF the motor, disconnect the hose and caddy cord from tank, and return to Caddy

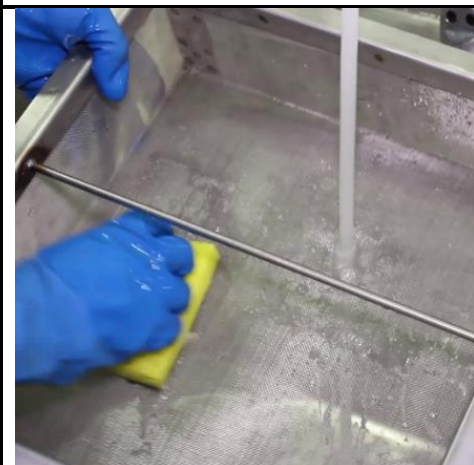

Clean the caddy after each use. Never use a metal spatula or sharp object to clean the Filter Basket.